

Thumb DFU upgrade Guide(only for Thumb software version less then 2.0.0)


Note:If you software version is higher then 2.0.0 ,you can upgrade thumb controller by MOZA Assistant (Win/Mac).

After this upgrade, you can upgrade the thumb controller using the“MOZAAssistant”software.

1. Tool preparation

Download the DFU software from:

<https://www.gudsen.com/upfile/admin/file/download/Lite2Thumb.zip>

 Lite2Thumb.zip

2. Recognize the thumb controller hardware and firmware version

There are 2 hardware versions of thumb controller, which are B & C. We will illustrate using the version C, the first letter of the barcode indicates the version number. Use Lite2_Thumb_B_2.0.0.dfu for hardware version B; and Lite2_Thumb_C_2.0.0.dfu for hardware version C




3. Enter to DFU mode



When the thumb controller is off, hold the "Option" button, plug in the USB cable; now you are entering the DFU mode



4. Open the downloaded DfuSe Demo software, select the firmware

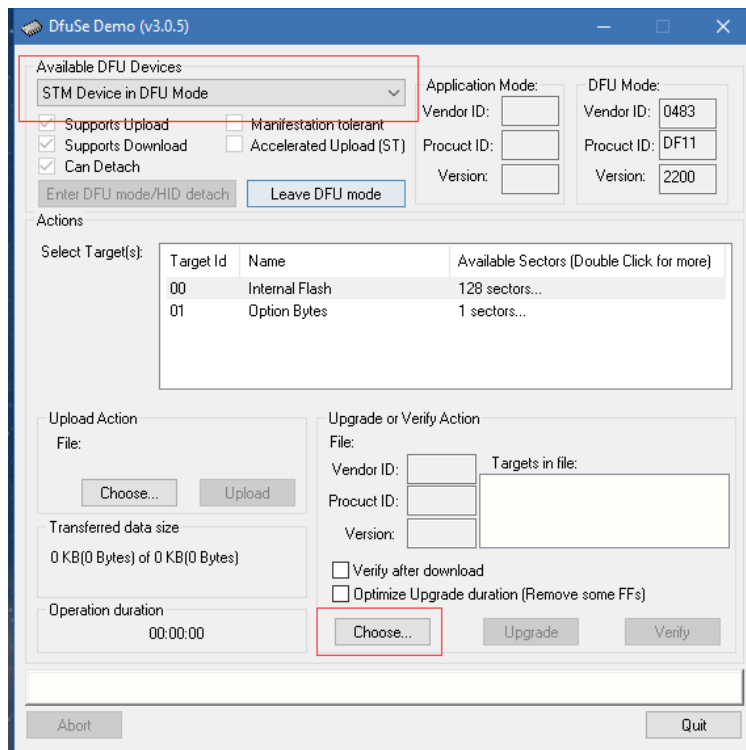

5. Upgrade

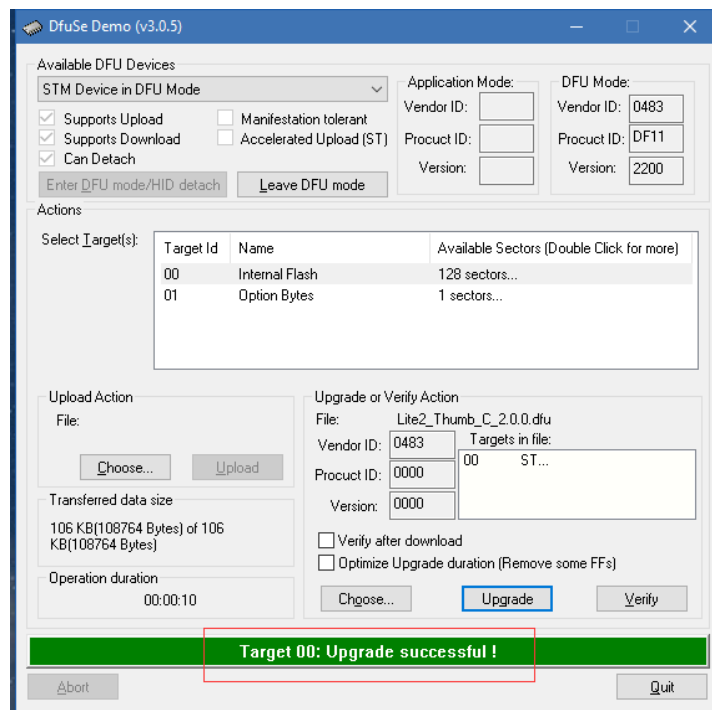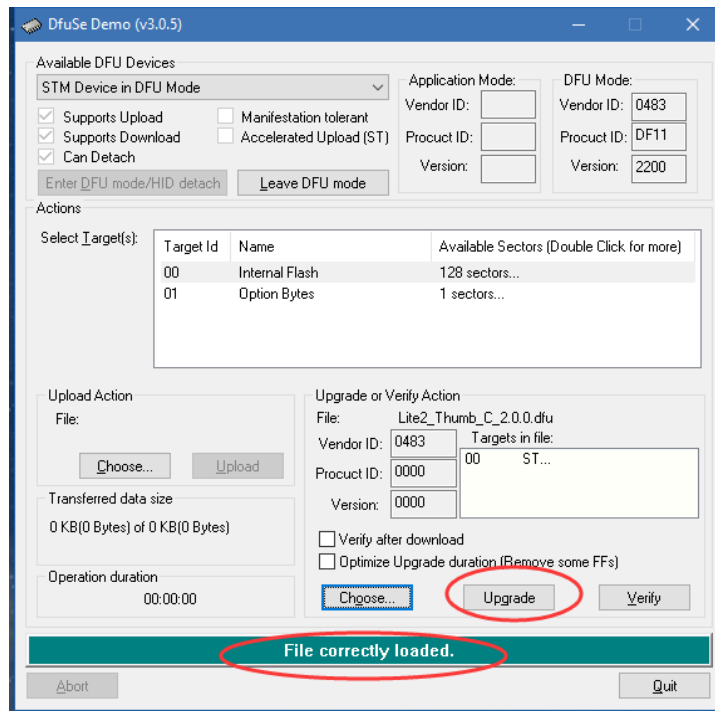

6. After the upgrade is completed, plug out the USB cable, restart the thumb controller.